



**AUGUSTO PEREIRA**

The future is now!



## **OTDR AVANÇADO**

Ref: 01101ST6418AV

### **ADVANCED SENTER OTDR ST6418 AV**

AV6418 OTDR is a high performance measuring instrument with multifunction designed for testing FTTx network.

It's mainly used to measure the physical characteristics of optical fiber under test, such as the length, the transmission loss and the splice loss etc.

It can also locate the faults or breaks of optical fiber.

It's widely applied in the manufacture, construction and maintenance in optical fiber communication system.

Due to its high resolution, AV6418 OTDR has 1m extra-short event dead zone, which is suitable for testing short optical fiber and pigtail optical fiber.

## MAIN FUNCTIONS

- Handheld, lightweight and convenience for carrying
- 45dB high dynamic range
- ≤1m extra-short event dead zone
- 0.05m high distance resolution, 128k sampling points
- Fast auto measurement, one-button operating
- Test up to four wavelengths with a single unit
- Communication light check automatically
- Remote function via Ethernet
- Double USB interfaces, supporting USB stick and printer and direct cable download to PC via ActiveSync
- Supporting Bellcore GR196 file format in writing or reading

## GENERAL SPECIFICATIONS

Dynamic range:	See "OTDR modules specifications"
Distance uncertainty:	$\pm(0.75\text{m} + \text{sample space} + \text{measurement distance} \times 0.003\%)$
Sampling resolution:	0.05, 0.1, 0.2, 0.5, 1, 2, 4, 8, 16m
Distance range:	0.4, 0.8, 1.6, 3.2, 6.4, 16, 32, 64, 128, 256, 512km (SMF); 0.4, 0.8, 1.6, 3.2, 6.4, 16, 32 (MMF of 850nm)
Pulse width:	5, 10, 30, 80, 160, 320, 640, 1280, 5120, 10240, 20480ns 5, 10, 30, 80, 160, 320, 640, 1280 (MMF of 850nm)
Loss threshold:	0.01dB
Sampling point:	Up to 128k
Linearity:	0.05dB/dB
Loss resolution:	0.001dB
Memory capacity:	≥800traces(build-in), ≥65500ytaces(2GB SD storage)
Group refractive index setting:	1.00000 to 2.00000 (0.0001steps)
Distance unit:	km, m, kft, ft
Display:	640x480, 6.5 inch TFT-LCD (touch screen)
Interface:	USB, Mini USB, Ethernet, earphone, SD
Optical connector:	FC/SC/ST (universal connector)
VFL:	650nm±10nm, 2mW(typical); CW/1Hz
OPM Wavelength range:	1270nm to 1700nm measurement r: -60 to +3dBm
Mesurement accuracy:	5% (-10dBm, CW)
Power supply:	Built-in Lithium battery 4400mAh and AC adapter
Language:	User selectable
Operating temperature:	-10 to 50°C (charging: 5 to 40°C)
Storage temperature:	-40 to 70°C (battery: -20 to 60°C)
Relative humidity:	5% to 95%, non-condensing
Dimensions:	295x186x75mm
Weight:	2.5Kg Approx.

## COMPOSITIONS OF THE OTDR

### Basic composition

- Power line
- AC/DC adapter
- Quality certification
- User manual
- Trace analyzing software(CD)
- Hard Carrying case(including gallus)
- Special gallus of instrument

### Modules specification

Order numbers	Operating wavelength	Fiber type	Dynamic range (dB)	Event dead zone (m)	Attenuation dead zone (m)
AV6418-2101	1310nm/1550nm	SMF	42/40	2/2	10/10
AV6418-3103	1310/1550/1625nm (build-in filter)	SMF	38/36/36	1/1/1	10/10/10
AV6418-4101	1310, 1490, 1550 and 1650				

## INTERFACES

AV6418 has abundant external interface, such as USB, Min-USB, Ethernet, ear-phone and SD, due to these, it can provide the following functions:


Training via multimedia for operators, which can enable you become a measuring expert within short time.

Implementing remote controlling through Ethernet, troubleshooting from long distance for fiber under test.

Printing trace and event table.




## OVERVIEW

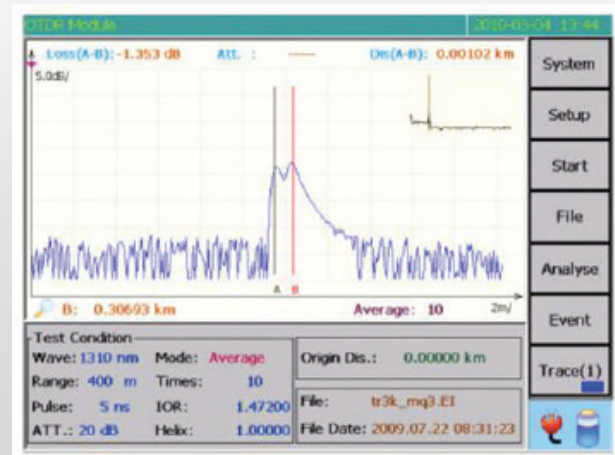

## HIGH SPEED AUTO ANALYZATION


AV6418 can quickly determine and locate the events and faults in trace precisely, then lists all events in even table, so it's very useful to maintainers to improving efficiency and it's unnecessary to know about the relative background knowledge.

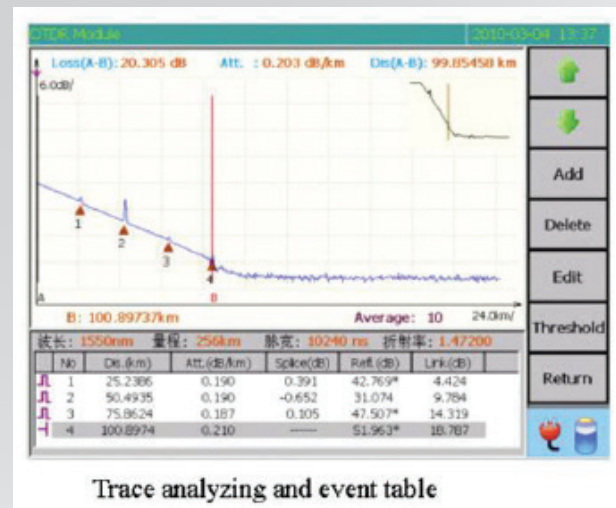

## HIGH SPEED AUTO MEASUREMENT

The function of auto measurement of AV6418 OTDR makes it unnecessary to operator to know about the further details of operating. The operation becomes very simple: after connect the fiber, only press **【Start】**, then the trace measured is displayed and the events are listed on screen in a few seconds, now, you can view the trace and event table.

## OVERVIEW

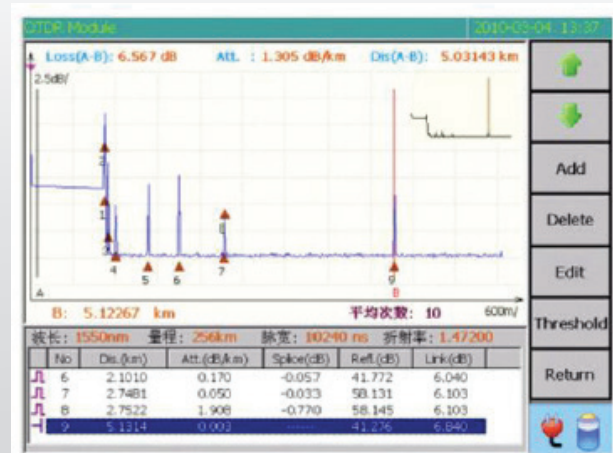

## CONVENIENT VFL FUNCTION

the built-in 650nm visual fault locator (VFL) is ideal for identifying bad splice, bad connector, break or macro bend easily. The standard VFL with more than 2 milliwatt output power is factory installed in AV6418, which the operation distance is in excess of 5 kilometers.

## COMMUNICATION LIGHT CHECK

When measuring a fiber in service, the measuring result by an OTDR is not precise, and there is a potential risk of permanent damage to the internal photoelectric of OTDR receiver. To prevent these problems, the AV6418 OTDR can detect automatically and silently if communication light is present after the fiber under test is connected, once the light is verified present, simultaneously, a warning message will be displayed and internal OTDR protection will be active instantly.

## MULTIPLE WAVELENGTHS AND MODELS

AV6418 OTDR can provide any of single mode or multimode or both, designed to test FUT at up to four wavelengths in single unit, such as 850, 1300, 1310, 1383, 1490, 1550, 1625 and 1650nm wavelengths, with which AV6418 can be used widely from long range to FTTx, CATV, LAN, Access and Metro networks.




## UNIQUE PON TESTING CAPABILITY

AV6418 is ideal for access and FTTH network testing, it enable you to test through 1x32 even 1x64 splitters for PON(passive optical network) testing.

AV6418 offers an exceptional 1m event dead zone and 0.05m high distance resolution, with which you can characterize all events between the transmitter and the central office's fiber distribution panel.

## OVERVIEW

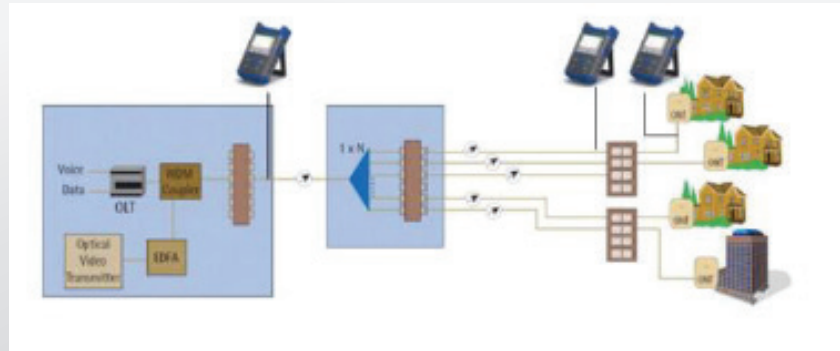

## TYPICAL APPLICATION

AV6418 OTDR is mainly used to measure FTTx network, it provides multifunctions in one unit. AV6418 offers three measuring modes: manual mode (including real time mode and average mode), auto mode and dead zone mode.

Manual measurement mode: manual mode is suitable for skilled operator who is familiar with the instrument. In this measurement mode, to get more accurate results, real-time mode or average mode can be selected if necessary.

In real-time mode, the dynamic changes of fiber chain can be detected timely, it is very useful when you need to observe the effect and process of fiber being spliced or connected.

In average measurement mode, the noise in trace can be suppressed, and the SNR (signal noise ratio) is improved, therefore, the result is more accurate. In fact, the more average times is executed, the more noise in trace is suppressed, and the longer time is spent for signal processing. In practice, the average times should be set properly according to necessity.

Auto measurement mode: the optimized measurement conditions are set automatically, it's unnecessary to operator to know about the complicated background knowledge and the further details of operating. In this mode, the more accurate results can be gained when proper average times are set, but it will increase the time of signal processing.

Dead zone mode: this mode is suitable for testing optical fiber with short distance and the optimized settings of distance range, pulse width and attenuator can be executed automatically.

To get the best result, the terminal return loss should be guaranteed less than -40dB.